AIR-SW10Ti



©2009 Sony Corporation

http://www.sony.net/

Important Safety Instructions

7) Do not block any ventilation openings. Install in

accordance with the manufacturer's instructions.

9) Do not defeat the safety purpose of the polarized or

8) Do not install near any heat sources such as radiators,

heat registers, stoves, or other apparatus (including

grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has

two blades and a third grounding prong. The wide blade

or the third prong are provided for your safety. If the

10) Protect the power cord from being walked on or pinched

particularly at plugs, convenience receptacles, and the

13) Unplug this apparatus during lightning storms or when

Servicing is required when the apparatus has been

applies only to the version of this

This equipment has been tested and found to comply

with the limits for a Class B digital device, pursuant to

Part 15 of the FCC Rules. These limits are designed to

interference in a residential installation. This equipment

generates, uses and can radiate radio frequency energy

and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio

communications. However, there is no guarantee that

or television reception, which can be determined by

interference will not occur in a particular installation. If

this equipment does cause harmful interference to radio

turning the equipment off and on, the user is encouraged

to try to correct the interference by one or more of the

Increase the separation between the equipment and

— Connect the equipment into an outlet on a circuit

Consult the dealer or an experienced radio/TV

different from that to which the receiver is connected.

Reorient or relocate the receiving antenna.

provide reasonable protection against harmful

model manufactured for sale in the

damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen

into the apparatus, the apparatus has been exposed to

rain or moisture, does not operate normally, or has been

14) Refer all servicing to qualified service personnel.

The following FCC statement

**U.S.A.** Other versions may not

comply with FCC technical

electrician for replacement of the obsolete outlet.

point where they exit from the apparatus.

12) Use only with the cart, stand, tripod,

bracket, or table specified by the

apparatus. When a cart is used, use

ised for long periods of time.

apparatus combination to avoid injury

manufacturer, or sold with the

caution when moving the cart/

from tip-over.

dropped.

regulations.

following measures:

technician for help.

11) Only use attachments/accessories specified by the

provided plug does not fit into your outlet, consult an

Do not use this apparatus near water.

amplifiers) that produce heat.

Read these instructions

Heed all warnings.

Follow all instructions

6) Clean only with dry cloth.

2) Keep these instructions.

### WARNING

# To reduce the risk of fire or electric shock, do not expose this apparatus to rain or

To reduce the risk of fire, do not cover the ventilation opening of the apparatus with newspapers, tablecloths, curtains, etc. Do not place the naked flame sources such as lighted candles on the apparatus.

To reduce the risk of fire or electric shock, do not expose this apparatus to dripping or splashing, and do not place objects filled with liquids, such as vases, on the apparatus. As the main plug is used to disconnect the unit from the mains, connect the unit to an easily accessible AC outlet. Should you notice an abnormality in the unit, disconnect the main plug from the AC outlet immediately.

The unit is not disconnected from the mains as long as it is connected to the AC outlet, even if the unit itself has been turned off.

Do not install the appliance in a confined space, such as a bookcase or built-in cabinet.

Do not expose batteries or apparatus with batteryinstalled to excessive heat such as sunshine, fire or the

The nameplate is located on the bottom exterior of the main unit (ATS-SW10Ti).

### Notice for the customers in the U.S.A.



This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) nstructions in the literature accompanying the appliance.

The following indications are located on the bottom exterior of the main unit (ATS-SW10Ti)





Owner's Record The model and serial numbers of the main unit are located on the bottom of the main unit, and those of the subwoofer are located at the rear of the subwoofer. Record these numbers in the space provided below. Refer to them whenever you call upon your Sony dealer regarding this product.

Model No. Serial No.

# **CAUTION**

You are cautioned that any changes or modifications not expressly approved in this manual could void your

#### For the wireless transceiver (EZW-RT10A)

This equipment must not be co-located or operated in

conjunction with any other antenna or transmitter. This equipment complies with FCC radiation exposure limits set forth for uncontrolled equipment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65.

This equipment should be installed and operated with at least 20cm and more between the radiator and person's body (excluding extremities: hands, wrists, feet and ankles).

# Notice for the customers in Canada

For the wireless transceiver (EZW-RT10A) This Class B digital apparatus complies with Canadian ICES-003.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with IC radiation exposure limits set forth for uncontrolled equipment and meets the RSS-102 of the IC radio frequency (RF) Exposure rules.

This equipment should be installed and operated with at least 20 cm and more between the radiator and person's body (excluding extremities: hands, wrists, feet and

#### **License and Trademark Notice**

- "S-AIR" and its logo are trademarks of Sony Corporation.
  iPod is a trademark of Apple Inc., registered in the U.S.
- and other countries.
- iPhone is a trademark of Apple Inc. • The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Sony Corporation is under license. Other trademarks and trade
- names are those of their respective owners. All other trademarks and registered trademarks are of their respective holders. In this manual, ™ and ® marks are

### Features

AIR-SW10Ti is an "S-AIR" compatible packaged product that consists of one S-AIR main unit and one subwoofer. You can enjoy high quality sound by connecting the subwoofer wirelessly. The subwoofer can be used only with this main unit.

\_\_\_\_ In addition, connecting the S-AIR main unit (hereafter called "main unit") to optional S-AIR sub units (hereafter called "sub units") using "S-AIR" technology, you can use each unit in a remote location.

For example, you can install optional sub units, one in a study room and the other in a bedroom, and install the system in the living room. You can then listen to music from the system located in the living room by controlling

Up to 10 optional sub units can be connected to a main

#### S-AIR (Sony Audio Interactive Radio frequency)


Recent times have seen the rapid spread of DVD media, Digital Broadcasting, and other high-quality

To ensure that the subtle nuances of these high-quality media are transmitted with no deterioration, Sony has developed a technology called "S-AIR" for the radio transmission of digital audio signals with no compression, and has incorporated this technology into the EZW-RT10A

This technology transfers digital audio signals with no compression using the 2.4 GHz band range of ISM band (Industrial, Scientific, and Medical band), such as wireless LANs and Bluetooth applications.


# (ATS-SW10Ti / Wireless Audio Transmitter)

authority to operate this equipment.

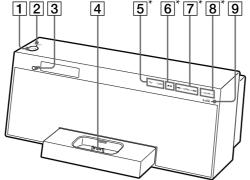


\* Touch sensitive button Operation using the touch sensitive button that beeps.

#### Subwoofer (SA-WA10R / Wireless Speaker System)



The subwoofer can be placed with the speaker side up.


#### Remote (RM-ANU066)

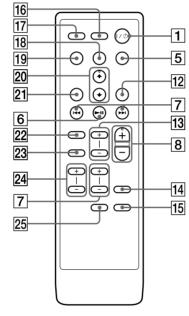

This manual mainly explains operations using the remote, but the same operations can also be performed using the buttons on the unit having the same or similar

### To use the remote

Slide and remove the battery compartment lid, and insert matching the polarities shown below.





### Notes on using the remote

- With normal use, the batteries should last for about six months • Do not mix an old battery with a new one or mix different types
- If you do not intend to use the remote for a long period of time.

# **Getting Started**

# Hooking up the system

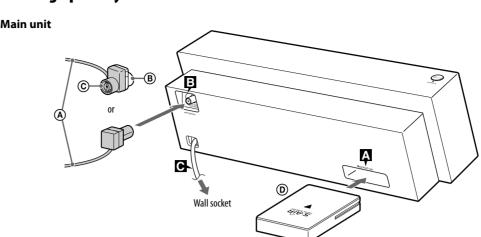

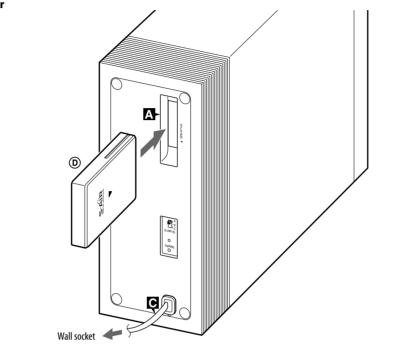

(A) FM lead antenna (extend horizontally) (B) White side for North American model © Brown side for other models (EZW-RT10A) Wireless transceiver

### A Wireless transceiver

Insert the supplied wireless transceiver (EZW-RT10A) securely into the EZW-RT10A slot on the rear panel of main unit and the subwoofer. Check the orientation of the **▼** mark when inserting the supplied wireless transceivers (EZW-RT10A). Failure to

do so may result in damage to the main unit and subwoofer

- Make sure to turn off the main unit and the subwoofer when inserting or removing the supplied wireless transceivers (EZW-RT10A). Failure to do so may result in damage to the main unit and
- $\bullet$  Do not touch the terminals of the supplied wireless transceivers (EZW-RT10A).
- Do not insert any device other than the supplied wireless transceivers (EZW-RT10A) into the EZW-RT10A slot.

# **B** FM antenna

Find a location and an orientation that provide good reception, and then set up the antenna. Keep the antenna away from the power cord to avoid picking up noise.

# **C** Power

Connect the power cord to a wall socket.


# To use the iPod/iPhone

Insert a Universal Dock Adapter into the Dock 4 before use. Use the supplied Universal Dock Adapter with the main unit for iPhone and iPhone 3G as follows. The adapter number is shown on the bottom of Dock Adapter.

- iPhone : **12** - iPhone 3G : **(15**)

When you use other iPod models, use the adapter supplied with your iPod model, or purchase a compatible Dock Adapter from Apple Inc.

To remove the Dock Adapter, pull it up with your fingernail or a flat object



## To set the clock

Use buttons on the remote to set the clock on the main

- 1 Press I/(1) 1 to turn on the main unit.
- 2 Select the clock set mode.
- Press CLOCK/TIMER 16 to select the clock set mode. If "PLAY SET" flashes, press ♠/♣ 20 repeatedly to select "CLOCK," and then press ENTER 12.

in the display.

power failure occurs

- Press ◆/◆ 20 repeatedly to set the hour, then press ENTER 12. Use the same procedure to set the minutes. When you turn off the unit, the clock display appears
- The clock settings are lost when you disconnect the power cord or if a

### To adjust the volume

Press VOLUME +/- 8

You can easily establish the connection by setting the

- 1 Check that the wireless transceivers are inserted
- securely in the main unit and the subwoofer.
- 3 Set the same S-AIR ID for the main unit and the

- 1 Press SYSTEM MENU 18.
- ② Press ◆/◆ 20 repeatedly until "S-AIR" appears,
- ③ Press ◆/◆ 20 repeatedly until "S-AIR ID" appears, then press ENTER 12.
- ④ Press ◆/◆ 20 repeatedly to select "A," "B" or "C," then press ENTER 12.

Set the S-AIR ID selector 10 on the rear panel to the same S-AIR ID as the main unit.

4 Confirm the connection status.

Once connection between the main unit and the the subwoofer lights up.

You can also connect up to 10 optional sub units to the main unit. In this case, set the S-AIR ID to the same ID as the main unit. For details on the S-AIR ID of the sub unit, refer to the Operating

#### Identifying the subwoofer with your main unit (Pairing operation)

It is easy to set the same S-AIR ID for the main unit and the subwoofer to establish the connection. However, if a neighbor has an AIR-SW10Ti system with the same S-AIR ID as your S-AIR main unit, the neighbor may be able to hear the audio transmitted from your main unit on the neighbor's subwoofer. Also, you may be able to hear the audio transmitted from your neighbor's main unit on your subwoofer. To prevent this, you can identify the subwoofer with your main unit by performing the pairing operation.

### **Before pairing**

ID: A

((((((((

ID: A

your main unit.

Pairing

Your AIR-SW10Ti system

Subwoofer

ID: A

1 Place the main unit near the subwoofer.

as the S-AIR ID of the subwoofer

**2** Check that the power of the main unit and the

**3** Check that the S-AIR ID of the main unit is the same

4 Perform the pairing operation of the main unit and

(2) Press ♠/♥ [20] repeatedly until "S-AIR" appears,

③ Press ♠/♣ 20 repeatedly until "PAIRING" appears,

"PAIRING" flashes and the main unit is ready for

ID: A

subwoofer is turned on

the subwoofer as follows:

1 Press SYSTEM MENU 18.

then press ENTER 12.

then press ENTER 12. "OK?" flashes. (4) Press ENTER 12 again.

pairing with the subwoofer.

Main unit

Connection is established by the S-AIR ID (example).

Connection is established between the subwoofer and

connected

AIR-SW10Ti system Your AIR-SW10Ti system

ID: A

((((((

ID: A

Neighboring AIR-SW10Ti system

Subwoofer

ID: A

ID: A

Main unit

for transmission. When you select this setting, select the S-AIR ID that provides the best connection. 5 Press ENTER 12 to exit the system menu.

# with the main unit

 $1/\bigcirc$  1 on the main unit to begin using the system. By pressing  $I/\bigcirc$  1 on the main unit to turn it off, the subwoofer will enter power save mode. Each time you press  $\hat{\mathbf{I}}/\hat{\mathbf{U}}$  1 on the main unit, the subwoofer will be turned on/off in sync with the main

You can check the power status of the subwoofer by the 1/\(\dagge)\) indicator \(\begin{align\*}\)2 on the subwoofer.

# **Subwoofer status indication**

I/🖰 indicator	Status
Green	Power on
Orange	Power save mode You can turn on the subwoofer by pressing I/(b) 1 on the main unit.
Red	Standby mode You cannot turn on the subwoofer by pressing I/() 1 on the main unit. To turn on the subwoofer, press I/() 1 on the subwoofer.

Press PAIRING 11 on the rear panel of the subwoofer using a pointed object. When pairing is performed, "COMPLETE" is

#### displayed on the main unit for 2 seconds and the PAIRING indicator [11] on the subwoofer lights up.

#### To cancel pairing

Change the S-AIR IDs of the main unit and the subwoofer to different S-AIR IDs.

#### To stop the pairing operation midway It takes a few seconds to complete the pairing of the main

unit and subwoofer after pressing PAIRING 11 on the rear panel of the subwoofer in step 4.

You can undo the pairing setting before completing the pairing. If you have done the pairing operation of only the main

unit, repeat (1) to (4) of step 4 again. If you have done the pairing operation of both the main unit and subwoofer, repeat 1 to 4 of step 4 and press

PAIRING [11] on the rear panel of the subwoofer.

#### You can also pair the main unit with optional sub units. For details

on turning on the pairing function, refer to the Operating Instructions supplied with the sub unit.

#### If the S-AIR connection is unstable Since the S-AIR product uses radio waves that share the

same frequency (2.4 GHz) as other wireless systems, such as wireless LAN or Bluetooth devices, interference or poor transmission may result if you use other wireless devices near the system. In this case, the connection may be improved by

changing the RF CHANGE (Radio Frequency Change) setting on the main unit. 1 Press SYSTEM MENU 18.

- 2 Press ◆/◆ 20 repeatedly until "S-AIR" appears, then
- press ENTER 12 3 Press ◆/▼ 20 repeatedly until "RF CHANGE" appears, then press ENTER 12.
- 4 Press ♠/♥ 20 repeatedly to select the desired
- The default setting is underlined.

### Normally select this setting. The main unit changes

automatically.

The main unit transmits sound using a fixed channel

# Turning the subwoofer on/off in sync

When the subwoofer is on or in power save mode, press

I/① indicator	Status
Green	Power on
Orange	Power save mode You can turn on the subwoofer by pressing $I/\binom{t}{1}$ on the main unit.
Red	Standby mode You cannot turn on the subwoofer by pressing I/(¹) 1 on the main unit. To turn on the subwoofer, press I/(¹) 1 on the subwoofer.

# **Establishing the S-AIR connection**

same S-AIR ID for the main unit and the subwoofer.

- 2 Press I/🖰 🚺 on the main unit and the subwoofer to

The S-AIR ID is set at the factory to "A."

subwoofer is established, the S-AIR indicator **9** on


the RF CHANGE setting to "ON" or "OFF"

The main unit transmits sound by searching for the best channel for transmission.

I/ indicator	Status
Green	Power on
Orange	Power save mode You can turn on the subwoofer by pressing I/() 1 on the main unit.
Red	Standby mode You cannot turn on the subwoofer by pressing I/U 1 on the main unit. To turn on the subwoofer, press I/U 1 on the subwoofer.

### Playing the iPod/iPhone

- 1 Select the iPod function
- Press FUNCTION repeatedly (or iPod on the unit)
- **2** Place the iPod/iPhone on the iPod/iPhone

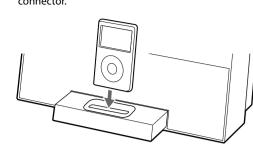

**3** Start playback. Press >II 6.

### To control the iPod/iPhone

You can control your iPod/iPhone with the following buttons on the main unit.

	То	Press
	Pause playback	►II 6. To resume playback, press ►II 6 again.
	Select a menu or track for playback	♠/♥ 20. You can scroll up or down the iPod/iPhone menus.
	Skip a track	<b> </b> ◀◀/ <b>▶▶ </b> 7.
	Find a point in a track	Hold down ► / ► 7 during playback, and release the button at the desired point.
	Choose the selected item	ENTER 12. You can choose the selected item much like the center button on the iPod.
	Return to the previous menu	iPod MENU/RETURN 21. You car return to the previous menu much like the Menu button on the iPod/ iPhone.

## To use the unit as a battery charger

You can use the main unit as a battery charger for the iPod/iPhone. Charging begins when the iPod/iPhone is placed on the iPod/iPhone connector. The charging status appears on the iPod/iPhone display. For details, refer to the user's guide of your iPod/iPhone.

# To stop charging the iPod/iPhone

Remove the iPod/iPhone.

# • While playing the tuner in the PARTY mode, you cannot operate the

- When placing or removing the iPod/iPhone, handle the iPod/iPhone in the same angle as that of the iPod/iPhone connector on the system and do not twist or sway the iPod/iPhone to prevent connector
- Do not carry the main unit with an iPod/iPhone set on the
- connector. Doing so may cause a malfunction • When placing or removing the iPod/iPhone, brace the main uni with one hand and take care not to press the controls of the iPod/
- iPhone by mistake. • Before disconnecting the iPod/iPhone, pause playback.
- The volume level of the main unit does not change even if adjusted on the iPod/iPhone. • The main unit is designed for iPod/iPhone only. You cannot connect
- any other portable audio players. • Depending on the iPod/iPhone model you are using and its status, operations using the main unit may not be accepted or the wrong
- operations may be performed. Sony cannot accept responsibility in the event that data recorded to an iPod/iPhone is lost or damaged when using the iPod/iPhone with
- this S-AIR product.

# Listening to the radio

1 Select "FM."


Press FUNCTION repeatedly (or TUNER on the unit)

For automatic tuning

Press and hold TUNING +/- 7 until the frequency indication changes and then release.

"AUTO" lights up. Scanning stops automatically when a station is tuned in, and then "TUNED" and "ST" (for FM stereo programs only) appear.






### For manual tuning

Press TUNING +/- 7 repeatedly to tune in the desired station.

#### reduce static noise on a weak FM stereo station, press FM MODE 14 repeatedly until "MONO" appears to turn off stereo reception.

#### Presetting radio stations

- Use buttons on the remote to preset stations.
- **1** Tune in the desired station.
- 2 Press SYSTEM MENU 18.
- 3 Press **4**/**₹** 20 repeatedly until "TUNER" appears, then press ENTER 12
- 4 Press ◆/▼ 20 repeatedly until "MEMORY" appears, then press ENTER 12.



5 Press ◆/◆ 20 repeatedly to select your desired

If another station is already assigned to the selected preset number, that station is replaced by the new station.

- 6 Press ENTER 12.
- **7** Repeat steps 1 through 6 to store other stations. You can preset up to 20 FM stations. The preset stations are retained for about half a day even if you disconnect the power cord or if a power failure occurs.

To call up a preset radio station Press PRESET +/- **24** repeatedly.

# Adjusting the sound

The main unit's DSP (Digital Signal Processor) system provides the following optional sound settings.

#### **CROSSOVER**

ENTER 12.

You can set the frequency that is output by the subwoofer A lower setting value will provide deeper bass. 1 Press SYSTEM MENU 18.

- 2 Press ◆/◆ 20 repeatedly until "SOUND" appears, then press ENTER 12 3 Press ◆/◆ 20 repeatedly until "CROSSOVER" appears,
- then press ENTER 12. 4 Press ◆/▼ 20 to change the crossover frequency (Hz) from "80," "100," "120," "140" or "160," then press

The default setting is "120."

**5** Press SYSTEM MENU 18 to exit the system menu.

### **SUBWOOFER PHASE**

In some cases, main unit and subwoofer sound integration may be unsatisfactory due to phase cancelation, which can be remedied by reversing the subwoofer's phase, as follows.

- 1 Press SYSTEM MENU 18
- 2 Press ◆/◆ 20 repeatedly until "SOUND" appears, then press ENTER 12
- 3 Press ◆/◆ 20 repeatedly until "SW PHASE" appears, then press ENTER 12
- 4 Press ◆/◆ 20 to select "NORMAL" or "REVERSE," then press ENTER 12
- The default setting is "NORMAL." 5 Press SYSTEM MENU 18 to exit the system menu.

This function restores the treble frequencies lost during sound compression, naturally recreating the original

- 1 Press SYSTEM MENU 18
- 2 Press ◆/◆ 20 repeatedly until "SOUND" appears, then press ENTER 12
- 3 Press ◆/◆ 20 repeatedly until "PAE+" appears, then press ENTER 12
- 4 Press ◆/◆ 20 to select "ON" or "OFF," then pressing
- The default setting is "OFF." **5** Press SYSTEM MENU 18 to exit the system menu.

### **BASS BOOST**

You can boost the lower frequencies of sound sources

Press BASS BOOST 23 repeatedly to select "ON" or "OFF." The default setting is "OFF."

### PRESET EQ

You can select the sound effect.

Press EQ 22 repeatedly to select "FLAT," "ROCK," "POP," or "JAZZ." The default setting is "ROCK."

### SUBWOOFER LEVEL

You can adjust the subwoofer's level.

Press SUBWOOFER LEVEL +/- 13 repeatedly to switch the level "-3"(-6dB), "-2"(-4dB), "-1"(-2dB), "0"(0dB), "+1"(+2dB), "+2"(+4dB), "+3"(+6dB). The default setting is "+1."

# Turning off the beep sound

When you press a touch sensitive button, a beep sounds. The following steps show you how to disable the beep.

- 1 Press SYSTEM MENU 18.
- 2 Press ◆/◆ 20 repeatedly until "SYSTEM" appears, then press ENTER 12.
- 3 Press ◆/◆ 20 repeatedly until "BEEP" appears, then press ENTER 12
- 4 Press ◆/◆ 20 to select "OFF," then press ENTER 12. When you enable the beep, select "ON" in step 4.

# Changing the display

You can change the information in the display.

#### While the main unit is on

Press DISPLAY 19. Each time you press the button, the display changes as follows: Frequency → Clock\*

\* When an optional sub unit is connected to the unit, the sub unit can display the same information except for the clock.

The clock is displayed. You can turn off the clock display to minimize the amount of power consumed (power save

Press DISPLAY 19 when the clock is displayed. Press the button again to display the clock.

#### When displaying the menu, no information appears in the display.

Using the timers

### The system offers two timer functions. If you use both

timers, the Sleep Timer has priority. Sleep Timer

You can fall asleep to music. This function works even if

the clock is not set. Press SLEEP 17 repeatedly to select the setting time  $(OFF \rightarrow 90 \text{min} \cdots 30 \text{min} \rightarrow 20 \text{min} \rightarrow 10 \text{min} \rightarrow$ 

You can wake up to iPod/iPhone or tuner at a preset time. Make sure you have set the clock

- 1 Press VOLUME  $\pm -8$  to adjust the volume.

**4** Set the time to start playback.

2 Press CLOCK/TIMER 16.

- 3 Press ◆/◆ 20 repeatedly until "PLAY SET" appears, then press ENTER 12. "ON TIME" appears, and the hour indication flashes.
- Press ♠/♥ 20 repeatedly to set the hour, then press ENTER 12. The minute indication flashes. Use the same

procedure above to set the minutes. "OFF TIME"

- appears and the hour indication flashes. **5** Use the same procedure in step 4 to set the time to stop playback.
- **6** Select the sound source. Press ♠/♥ 20 repeatedly to select "iPod" or "TUNER," then press ENTER 12. The display shows the timer
- settings. 🕘 lights up. 7 Turn off the system. Press 1/(1) 1. The system turns on 15 seconds before
- If the system is on at the preset time, the Play Timer will not function. Do not operate the system from the time the system turns on until playback starts.

### To check the setting

- 1 Press CLOCK/TIMER 16. "SELECT" flashes.
- 2 Press ENTER 12.
- 3 Press ◆/◆ 20 repeatedly until "PLAY SEL" appears, then press ENTER 12.

### To cancel the timer

Repeat the same procedure above until "OFF" in step 3, and then ENTER 12.

#### To change the setting Start over from step 1.

Notes for the iPod/iPhone user

• Make sure the iPod/iPhone is not playing when using the Play

The Play Timer setting remains as long as the setting is not canceled

• The Play Timer may not be activated depending on the status of

# Enioving the music in multiple rooms using the optional sub units

When you listen to music from an optional sub unit, you can use the following functions.

### Selecting the S-AIR mode (PARTY mode / MULTI SOURCE mode)

When connecting to multiple sub units, you can listen to different sound sources on each sub unit (MULTI SOURCE mode), or the same sound source on each sub unit (PARTY mode), by selecting the S-AIR mode accordingly.

Press S-AIR MODE 25 repeatedly to select "MULTI" or The selected S-AIR mode appears.

The default setting is underlined.

Select this setting to listen to different sound sources on each sub unit.

Select this setting to listen to the same sound source on

#### multiple sub units.

- When you change the S-AIR mode, the iPod channel is
- automatically selected for the connected sub units. • When connecting the main unit to a sub unit that is not compatible with the MULTI SOURCE mode, set the main unit to the PARTY mode. You can then select the S-AIR channel from the sub unit.
- When you select the PARTY mode, select the function (iPod or TUNER) by pressing PARTY CH 15 repeatedly.

### Using sub units when the main unit is off (S-AIR STANDBY mode)

You can stream the setting information and music to a sub unit from a unit via S-AIR even when the main unit is turned off.

- 1 Press SYSTEM MENU 18.
- 2 Press ◆/◆ 20 repeatedly until "S-AIR" appears, then press ENTER 12
- 3 Press ◆/◆ 20 repeatedly until "STANDBY" appears, then press ENTER 12.
- 4 Press ◆/◆ 20 to select "ON."
- When you set S-AIR STANDBY to "ON," you can listen to music from a sub unit, even if the main unit is turned off. When the main unit is turned on, you can listen to music from the main unit, subwoofer and sub

If you set the S-AIR STANDBY to "ON," "S-AIR" in the display on the main unit is as follows:

- Lights up when the sub unit is turned on.
- Flashes when the sub unit is turned off.

## If you set S-AIR STANDBY to "ON," no sound will be output from the main unit or the subwoofer when the power of the main unit is off.

#### Using the coupling operation with the optional sub unit and optional S-AIR remote commander

This system is compatible with the coupling operation. The coupling operation establishes a connection between the optional sub unit and optional S-AIR remote commander. For details, refer to the Operating Instructions of the optional S-AIR remote commander.

# **Troubleshooting**

- 1 Make sure the power cord is correctly and firmly
- 2 Find your problem in the checklist below, and take the indicated corrective action.

If the issue persists, contact your nearest Sony dealer. When bringing the product in for repairs, be sure to

bring in the entire system (main unit, subwoofer and wireless transceivers). This product is a system product, and the entire system is needed to determine the section requiring

### If the STANDBY indicator on the main unit $(1/\bigcirc)$ indicator on the subwoofer) |2|flashes.

Press 1/0 1 on the main unit or the subwoofer to turn it off, then unplug the power cord. After checking that there is no indication on the display, reconnect the power cord and press  $I/\bigcirc$  1 to turn on the main unit or the subwoofer. If the issue persists, contact your nearest Sony

#### General

repair.

# The remote does not function.

- Remove any obstacles between the remote and the remote sensor, and position the unit away from fluorescent lights.
- Point the remote at the remote sensor **3**. • Move the remote closer to the unit.

#### The S-AIR indicator 9 on the main unit does not light up and the S-AIR indicator 9 on the subwoofer flashes.

- Check that the power cords are connected securely and the main unit and the subwoofer are turned on.
- Check that the supplied wireless transceivers are inserted securely in the main unit and subwoofer.

#### Connecting the main unit and the subwoofer is not possible. (The S-AIR indicator 9 on the main unit is turned off and/or the S-AIR indicator 9 on the subwoofer flashes.)

• Check that the supplied wireless transceivers are

inserted securely in the main unit and subwoofer.

- If you use another S-AIR unit, place it more than 8 m away from the main unit.
- Confirm the S-AIR IDs of the main unit and subwoofer. • The main unit is paired with another subwoofer. Pair
- the main unit with the subwoofer you are using. • The main unit is paired with another subwoofer. Cancel Place the main unit and subwoofer away from other
- wireless devices.
- Stop using any other wireless devices. • The main unit or the subwoofer is turned off. Make sure the power cord are connected and turn on the main unit and subwoofer.
- There is no sound from the main unit. • Turn off the main unit and then turn it on again.

#### • Check that the power cord is connected securely and the main unit is turned on. Increase the volume of the main unit.

- There is no sound from the subwoofer. • If you use another main unit, place it more than 8 m
- away from the main unit. • Confirm the S-AIR IDs of the main unit and the
- subwoofer • Check the pairing setting.
- Place the main unit and subwoofer closer together. • Stop using any equipment that generates
- electromagnetic energy, such as a microwave oven. Place the main unit and subwoofer away from other wireless devices.
- Stop using any other wireless devices. • Change the S-AIR ID settings of the main unit and the
- subwoofer. • Turn off the main unit and the subwoofer and then turn
- them on again. • Check that the power cord is connected securely and the main unit and subwoofer are turned on.
- Increase the volume of the main unit. • Change the RF CHANGE setting on the main unit. • The subwoofer does not work effectively for music

#### There is no sound from an optional sub unit. For details on the sub unit, refer to the Operating Instructions supplied with the sub unit.

### There is noise or sound skips.

without lower frequencies.

• If you use another main unit, place it more than 8 m away from the main unit.

Place the main unit and subwoofer closer together.

electromagnetic energy such as a microwave oven. Place the main unit and subwoofer away from other wireless devices.

• Change the S-AIR ID settings of the main unit and

• Stop using any equipment that generates

• Change the RF CHANGE setting on the main unit.

• Stop using any other wireless devices.

#### The S-AIR channel fails to change, when you connect the main unit to an optional sub unit. • Check that the main unit and sub unit are connected

• If you are using a sub unit which is not compatible with the MULTI SOURCE mode, set the main unit to the PARTY mode.

### iPod/iPhone

#### There is no sound.

• Update your iPod/iPhone to use the latest software.

The iPod/iPhone cannot be operated by the

• Depending on the iPod/iPhone model you are using

and its status, it may not be possible to operate the

• Update your iPod/iPhone to use the latest software.

 $\bullet$  Set the "EQ" setting of the iPod/iPhone to "Off" or

• Make sure the iPod/iPhone is connected securely.

• Check that the power cord is connected securely.

Severe hum or noise, or stations cannot be

• Find a location and an orientation that provide good

• Keep the antenna away from the power cord to avoid

• Connect a commercially available external antenna.

To reset the main unit to factory settings

If the main unit still does not operate properly, reset the

1 Disconnect and reconnect the power cord, then

3 Press ◆/◆ 20 repeatedly until "SYSTEM" appears,

**5** Press ENTER **12** again to confirm the setting.

stations, timer, and the clock, are deleted.

4 Press ◆/◆ 20 repeatedly until "RESET" appears, then

All user-configured settings, such as preset radio

To reset the subwoofer to factory settings

If the subwoofer still does not operate properly, reset the

2 Press PAIRING 11 on the rear panel of the subwoofer

and  $I/\bigcirc$  1 for 3 seconds on the subwoofer at the

**TIME NG:** The Play Timer start and end times are set to the

• As the S-AIR product transmits sound by radio waves,

sound may skip if radio waves are obstructed. This is a

characteristic of radio waves and is not a malfunction

• As the S-AIR product transmits sound by radio waves,

• As the S-AIR product uses the radio waves that share

-Do not install S-AIR products near other wireless

—Do not use S-AIR products and other wireless

• The transmission distance differs depending on the

usage environment. Find a location where transmission

between the unit and subwoofer is most effective, and

• Completely disconnect the power cord from the wall

socket if the main unit and subwoofer are not going to be used for an extended period of time. When

unplugging them, always grip the plug. Never pull the

• Should any solid object or liquid get into the main unit

• The power cord should only be changed by a qualified

or a subwoofer, unplug the unit in question, and have it checked by qualified personnel before operating it

the same frequency as other wireless systems, such as

wireless LAN or Bluetooth devices, interference or poor

transmission may result. In this case, take the following

as a microwave oven, may interfere with sound

equipment that generates electromagnetic energy, such

1 Disconnect and reconnect the power cord, then

The pairing setting you configured is deleted.

received. ("TUNED" or "ST" flashes on the

reception, and then set up the antenna again

• Turn off nearby electrical equipment.

main unit to factory settings.

turn on the main unit.

2 Press SYSTEM MENU 18

then press ENTER 12

"RESET OK?" appears.

subwoofer to factory settings.

turn on the subwoofer.

Messages

**CANCEL:** Time out without pairing.

**COMPLETE:** Pairing is completed.

Notes on use of the S-AIR product

**PAIRING:** Pairing is in progress.

same time

transmission of the system.

systems at the same time.

service facility.

install the unit and subwoofer there.

Precautions

of the system.

press ENTER 12

Connect the antenna properly.

• Check that the iPod/iPhone and main unit are

• Adjust the volume of the main unit.

iPod/iPhone using the main unit.

• Turn down the volume of the main unit.

The iPod/iPhone cannot be charged.

connected properly

The sound is distorted.

Tuner

display.)

- position or in locations that are extremely hot, cold, • Make sure the iPod/iPhone is connected securely. Make sure the iPod/iPhone is playing music.
  - dusty, dirty, or humid or lacking adequate ventilation. Also, do not place in a location subject to vibration, direct sunlight or bright light.
  - Be careful when placing the unit and the subwoofer on surfaces that have been specially treated (for example, with wax, oil, polish), as staining or discoloration of the surface may result.

### On heat buildup

On placement

• Heat buildup of the unit and subwoofer during operation is normal and no cause for alarm.

### Cleaning the cabinet

Clean the cabinet with a soft dry cloth. Do not use any type of abrasive pad, scouring powder, or solvent, such as thinner, benzine, or alcohol.

### **Specifications**

#### **Main unit** (ATS-SW10Ti / Wireless Audio Transmitter)

AUDIO POWER SPECIFICATIONS POWER OUTPUT AND TOTAL HARMONIC DISTORTION: (The United States model only) With 8 ohm loads, both channels driven, from  $200 - 15{,}000$ Hz; rated 5 watts per channel minimum RMS power, with no

more than 10% total harmonic distortion from 200 milliwatts

# to rated output.

**Amplifier section** DIN power output (rated) 5 + 5 watts (8 ohms at 1 kHz, DIN)

Continuous RMS power output (reference)

5 + 5 watts (8 ohms at 1 kHz, 10% THD)

- Wireless transceiver (EZW-RT10A) S-AIR Specification version 1.0
- Frequency band 2.4000 GHz - 2.4835 GHz Modulation method: DSSS DC 3.3 V, 350 mA

Dimensions (w/h/d):

### $50 \times 13 \times 60 \text{ mm}$ 24 g

**Tuner section** FM stereo, FM superheterodyne tuner Γuning range: 87.5 — 108MHz (100kHz step)

FM lead antenna Antenna terminals: 75 ohms unbalanced Intermediate frequency:

**Speaker section** 

### Full-range, 60 mm, cone type Rated impedance 8 ohms




iPod touch

iPod nano

1st generation

iPod min



iPod nano 3rd generation

(video)



2nd generation



(aluminum)

iPod 4th generation

(color display)



iPhone 3G

iPod classic

iPod

5th generation

(video)

# Approx. 1.7 kg

### (SA-WA10R / Wireless Speaker System) AUDIO POWER SPECIFICATIONS

# (The United States model only) With 6 ohm loads, from $50-120~{\rm Hz};$ rated 50 watts minimum RMS power, with no more than 10% total harmonic distortion.

#### Amplifier section

Modulation method: DSSS

Dimensions (w/h/d):  $50 \times 13 \times 60 \text{ mm}$ 

120V AC, 60Hz Power consum Dimensions (w/h/d):

# Approx. 4.3 kg

Remote commander (RM-ANU066) (1) R03 (size AAA) batteries (2) FM lead antenna (1) Universal Dock Adapters for iPhone (2)

General Power requirements: 120V AC, 60Hz Power consumption: Dimensions (w/h/d):

POWER OUTPUT AND TOTAL HARMONIC

DIN power output (rated): 40 watts (6 ohms at 60 Hz, DIN)

Continuous RMS power output (reference): 50 watts (6 ohms at 60 Hz, 10% THD)

#### S-AIR Specification version 1.0 Frequency band 2.4000 GHz - 2.4835 GHz

DC 3.3 V, 350 mA

# 24 g

Speaker Speaker system Woofer, 100 mm, cone type, bass-reflex

# General

Approx.  $123 \times 282 \times 375 \text{ mm}$ 

# Supplies accessories

Design and specifications are subject to change without notice. Halogenated flame retardants are not used in the certain printed wiring

# • Do not place the unit and subwoofer in an inclined

Approx.  $310 \times 121 \times 162 \text{ mm}$ 

# Subwoofer

Wireless transceiver (EZW-RT10A)

Mass:

Rated impedance:

Mass: